

## TEKNİK ÖZELLİKLER / TECHNICAL SPECIFICATIONS

KOD CODE	GÜÇ(W) POWER	IŞIK KAYNAĞI LAMP TYPE	IŞIK AKISI(lümen) LIGHT FLUX	BOYUTLAR (øxH) mm DIMENSIONS(øxH) mm
138500/138510	45,5/76,3	LED	4095/6867	620x77
138501	58,5	LED	5265	800x77
138502	65	LED	5850	900x77
138503	71,5	LED	6435	1000x77
138504	84,5	LED	7605	1200x77
138505	143	LED	12870	2000x77
138506	364	LED	32760	5000x77
138600	45,5	LED	4095	620x95
138606	364	LED	32760	5000x95
138703	119,9	LED	10791	1000x110
138706	610,4	LED	54936	5000x110
138804	141,7	LED	12753	1200x200
138806	610,4	LED	54936	5000x200
138000	∞	LED	∞	∞x77
138000	∞	LED	∞	∞x95
138000	∞	LED	∞	∞x110
138000	∞	LED	∞	∞x200



## GÖVDE / BODY

Alüminyum ekstrüzyon profil  
Aluminium extrusion profile

## DIFFÜZÖR / DIFFUSER

Yüksek geçirgenlikte led diffüzör.  
Led diffuser with high permeability

## LED

Tridonic / Nichia / Osram / Samsung

## LED SÜRÜCÜ / LED DRIVER


Tridonic

## KOMPONENT / COMPONENT

Halojen free kablo, konnektör, klemens, dekoratif şeffaf kablo  
ayarlanabilir mekanizmalı çelik tel  
Halogen free cable, connectors, terminal, decorative transparent cable  
adjustable steel hanger wire



Ø

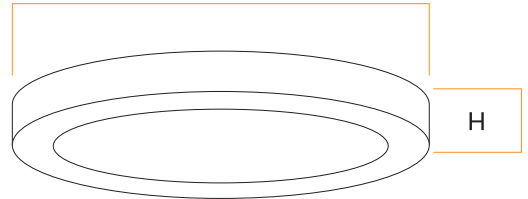

www.spektralaydinlatma.com