

TEKNİK ÖZELLİKLER / TECHNICAL SPECIFICATIONS

KOD CODE	GÜÇ(W) POWER	IŞIK KAYNAĞI LAMP TYPE	IŞIK AKISI(lümen) LIGHT FLUX	BOYUTLAR (øxH) mm DIMENSIONS(øxH) mm
143500	26	LED	2600	300x77
143501	39	LED	3900	400x77
143502	65	LED	6500	600x77
143503	143	LED	14300	800x77
143504	260	LED	26000	1000x77
143505	331,5	LED	33150	1200x77
143601	39	LED	3900	400x95
143603	143	LED	14300	800x95
143605	331,5	LED	33150	1200x95
143702	65	LED	6500	600x110
143705	331,5	LED	33150	1200x110
143000	∞	LED	∞	∞x77
143000	∞	LED	∞	∞x95
143000	∞	LED	∞	∞x110
143000	∞	LED	∞	∞x200



GÖVDE / BODY

Alüminyum ekstrüzyon profil
Aluminium extrusion profile

DİFFÜZÖR / DIFFUSER

Yüksek geçirgenlikte led diffüzör.
Led diffuser with high permeability

LED


Tridonic / Nichia / Osram / Samsung

LED SÜRÜCÜ / LED DRIVER

Tridonic

KOMPONENT / COMPONENT

Halojen free kablo, konektör, klemens, dekoratif şeffaf kablo
ayarlanabilir mekanizmalı çelik tel
Halogen free cable, connectors, terminal, decorative transparent cable
adjustable steel hanger wire

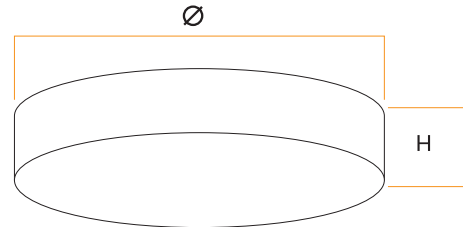

www.spektralaydinlatma.com