




TEKNİK ÖZELLİKLER / TECHNICAL SPECIFICATION

KOD CODE	GÜÇ(W) POWER	IŞIK KAYNAĞI LAMP TYPE	IŞIK AKIŞI(lümen) LIGHT FLUX	BOYUTLAR (wXlXh) mm DIMENSIONS (wXlXh) mm	KESİM ÖLÇÜLERİ CUT-OUT DIMENSIONS (W1XL1) mm
204500	26	LED	3120	300x300x77	288x288
204501	52	LED	6240	300x600x77	288x588
204502	104	LED	12480	600x600x77	588x588
204503	104	LED	12480	300x1200x77	288x1188
204602	104	LED	12480	600x600x95	588x588
204000	∞	LED	∞	∞x∞x77	∞ x ∞
204000	∞	LED	∞	∞x∞x95	∞ x ∞



GÖVDE / BODY

Aluminyum ekstrüzyon profil
Aluminium extrusion profile

DİFFÜZÖR / DIFFUSER

Yüksek geçirgenlikte led diffüzör.
Led diffuser with high permeability

LED


Tridonic / Nichia / Osram / Samsung

LED SÜRÜCÜ / LED DRIVER

Tridonic

KOMPONENT / COMPONENT

Halojen free kablo, konektör, klemens
Halogen free cable, connectors, terminal

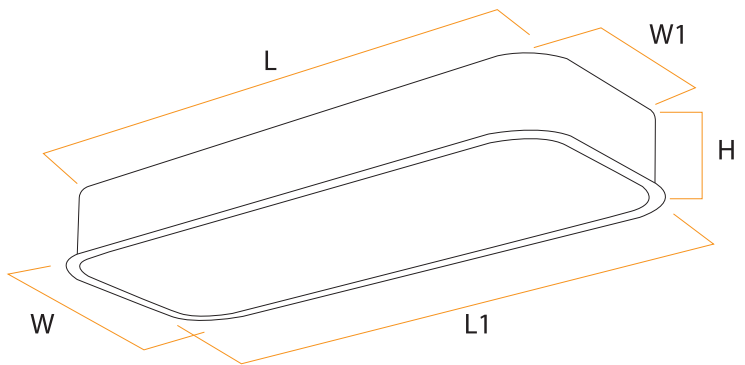

www.spektralaydinlatma.com